

LUXORJET

1. White colour as a background on the whole surface of the acrylic trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)


Tips when preparing the artwork by yourself

AC004-PW

LUXORJET

- if the coloured background has to reach the edge of the acrylic, extend it beyond the outline of the glass 8 mm on each side
- minimum resolution for illustrations or photos 300 dpi
- external outline of the acrylic - **TEMPLATE** please do not change the color and thickness of the line
- all fonts converted to curves**
- smallest font used 8 pt
- minimum thickness of lines used in the design **0.2 mm**

an area where essential elements should be placed, i.e. text, logo, etc.

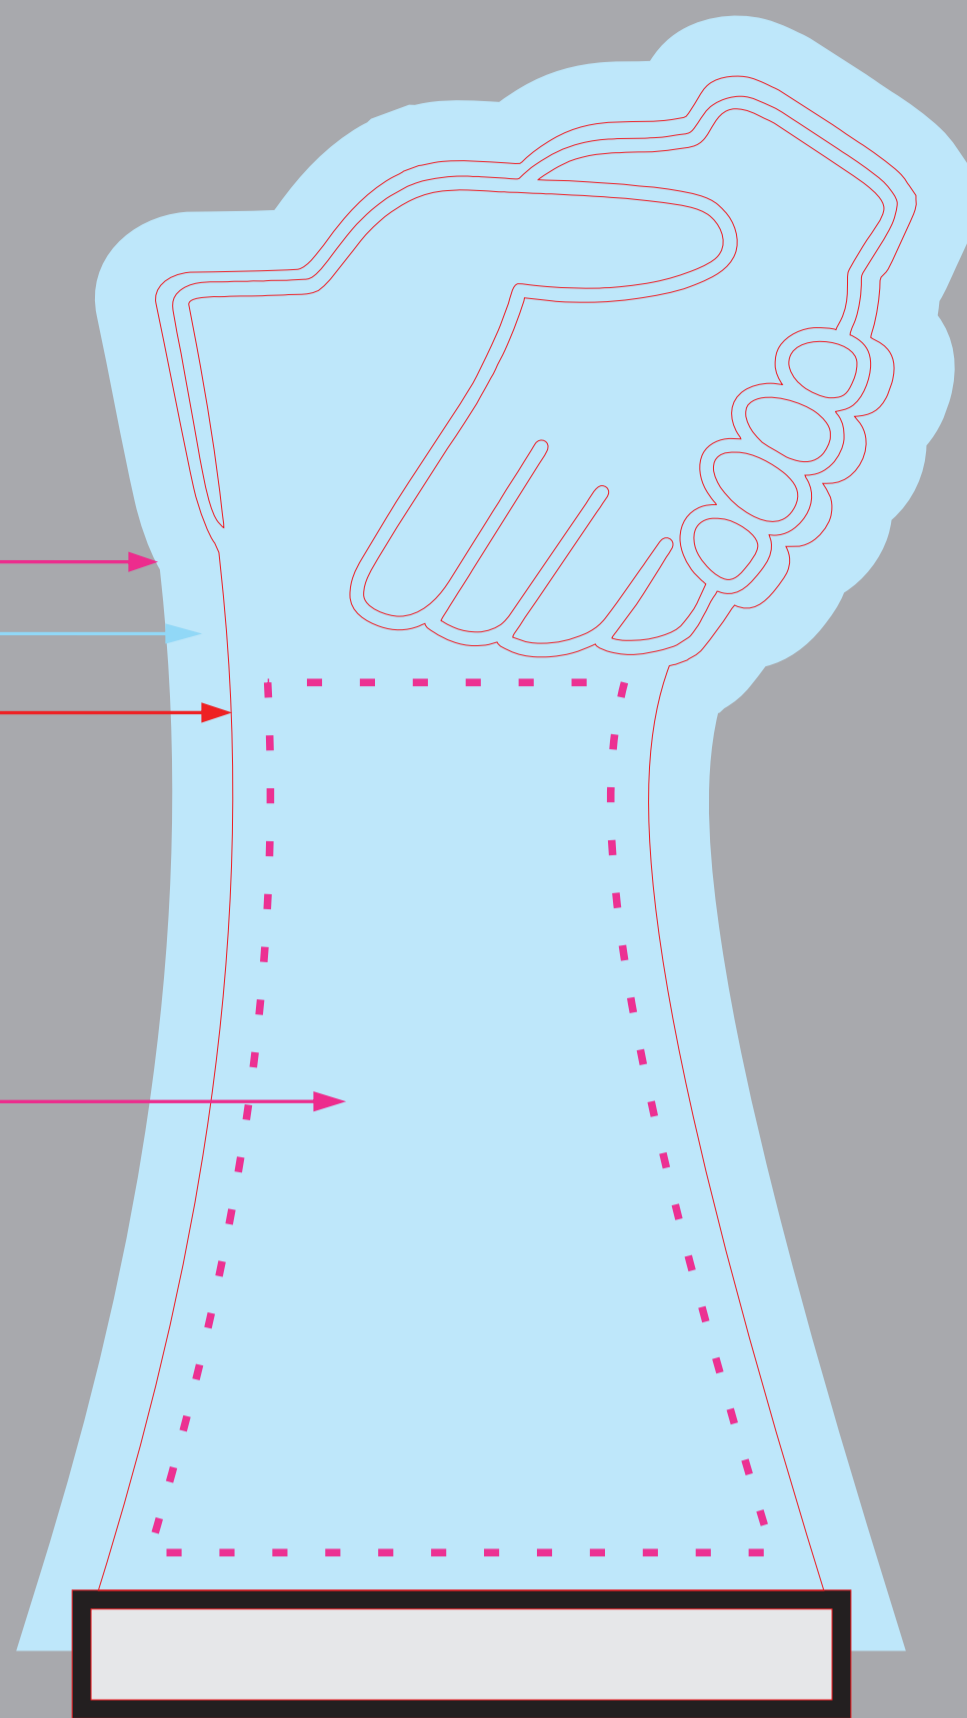

AC004-PW

ENGRAVING

Tips when preparing the artwork by yourself

- external outline of the acrylic - **TEMPLATE** please do not change the color and thickness of the line
- all fonts converted to curves**
- smallest font used 8 pt
- minimum thickness of lines used in the design **0.2 mm**

laser engraving area

- we only use vector objects (inscriptions, logos, characters)
- the pattern for engraving will be prepared in grey using 70 % black in **C M Y K** scale
- distance of the lowest inscription from the base **20 mm**

