


# LUXORJET

1. White colour as a background on the whole surface of the acrylic trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)

## Tips when preparing the artwork by yourself

| LUXORJET   |
|--|
| if the coloured background has to reach the edge of the acrylic, extend it beyond the outline of the glass 8 mm on each side |
| minimum resolution for illustrations or photos 300 dpi   |
| external outline of the acrylic - TEMPLATE please do not change the color and thickness of the line                          |
| <b>all fonts converted to curves</b>   |
| smallest font used 8 pt  |
| minimum thickness of lines used in the design 0.2 mm   |

an area where essential elements should be placed, i.e. text, logo, etc.

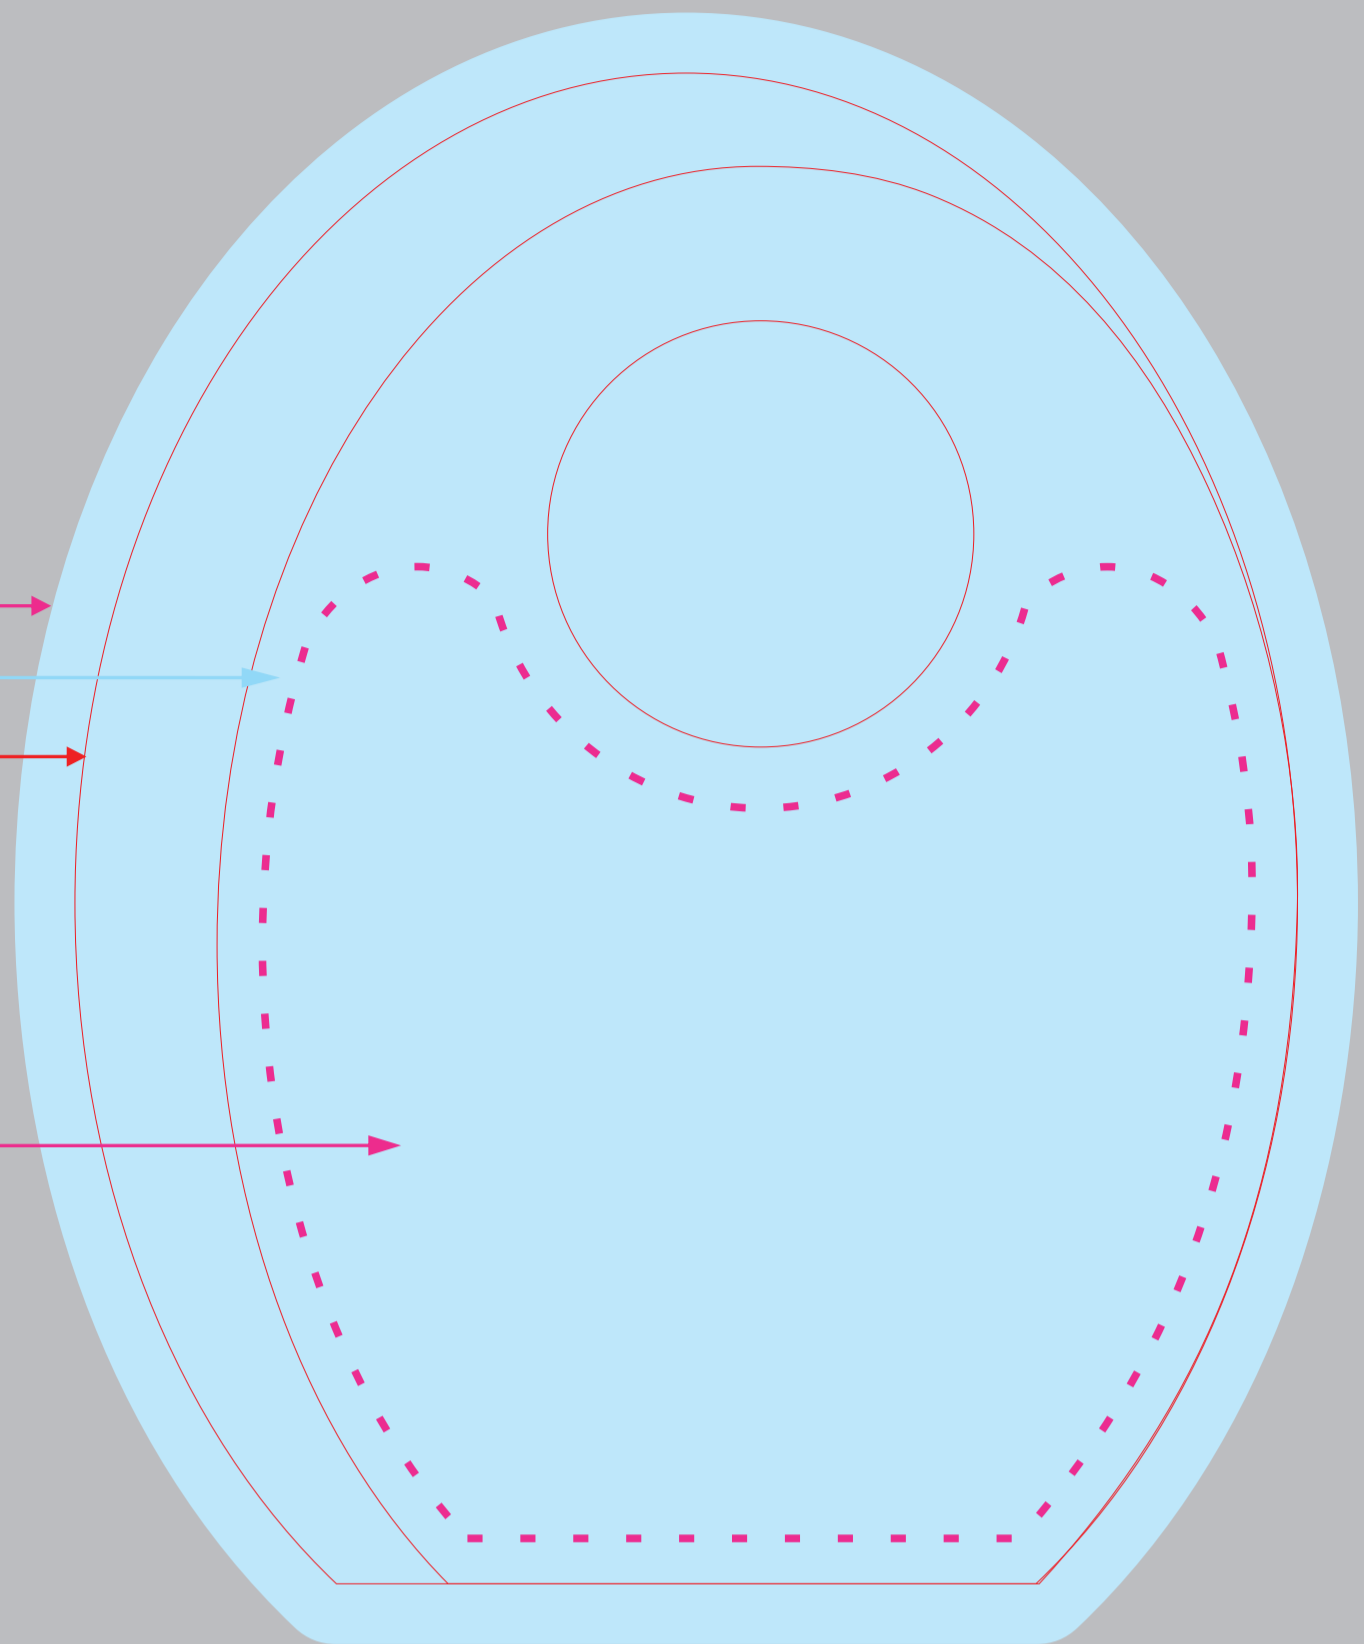


**AC008-PW**

# ENGRAVING

## Tips when preparing the artwork by yourself

|   |
|---|
| external outline of the acrylic - TEMPLATE please do not change the color and thickness of the line |
| <b>all fonts converted to curves</b>  |
| smallest font used 8 pt   |
| minimum thickness of lines used in the design 0.2 mm  |
| <b>laser engraving area</b>   |
| we only use vector objects (inscriptions, logos, characters)  |
| the pattern for engraving will be prepared in grey using 70 % black in C M Y K scale                |
| distance of the lowest inscription from the base 20 mm  |

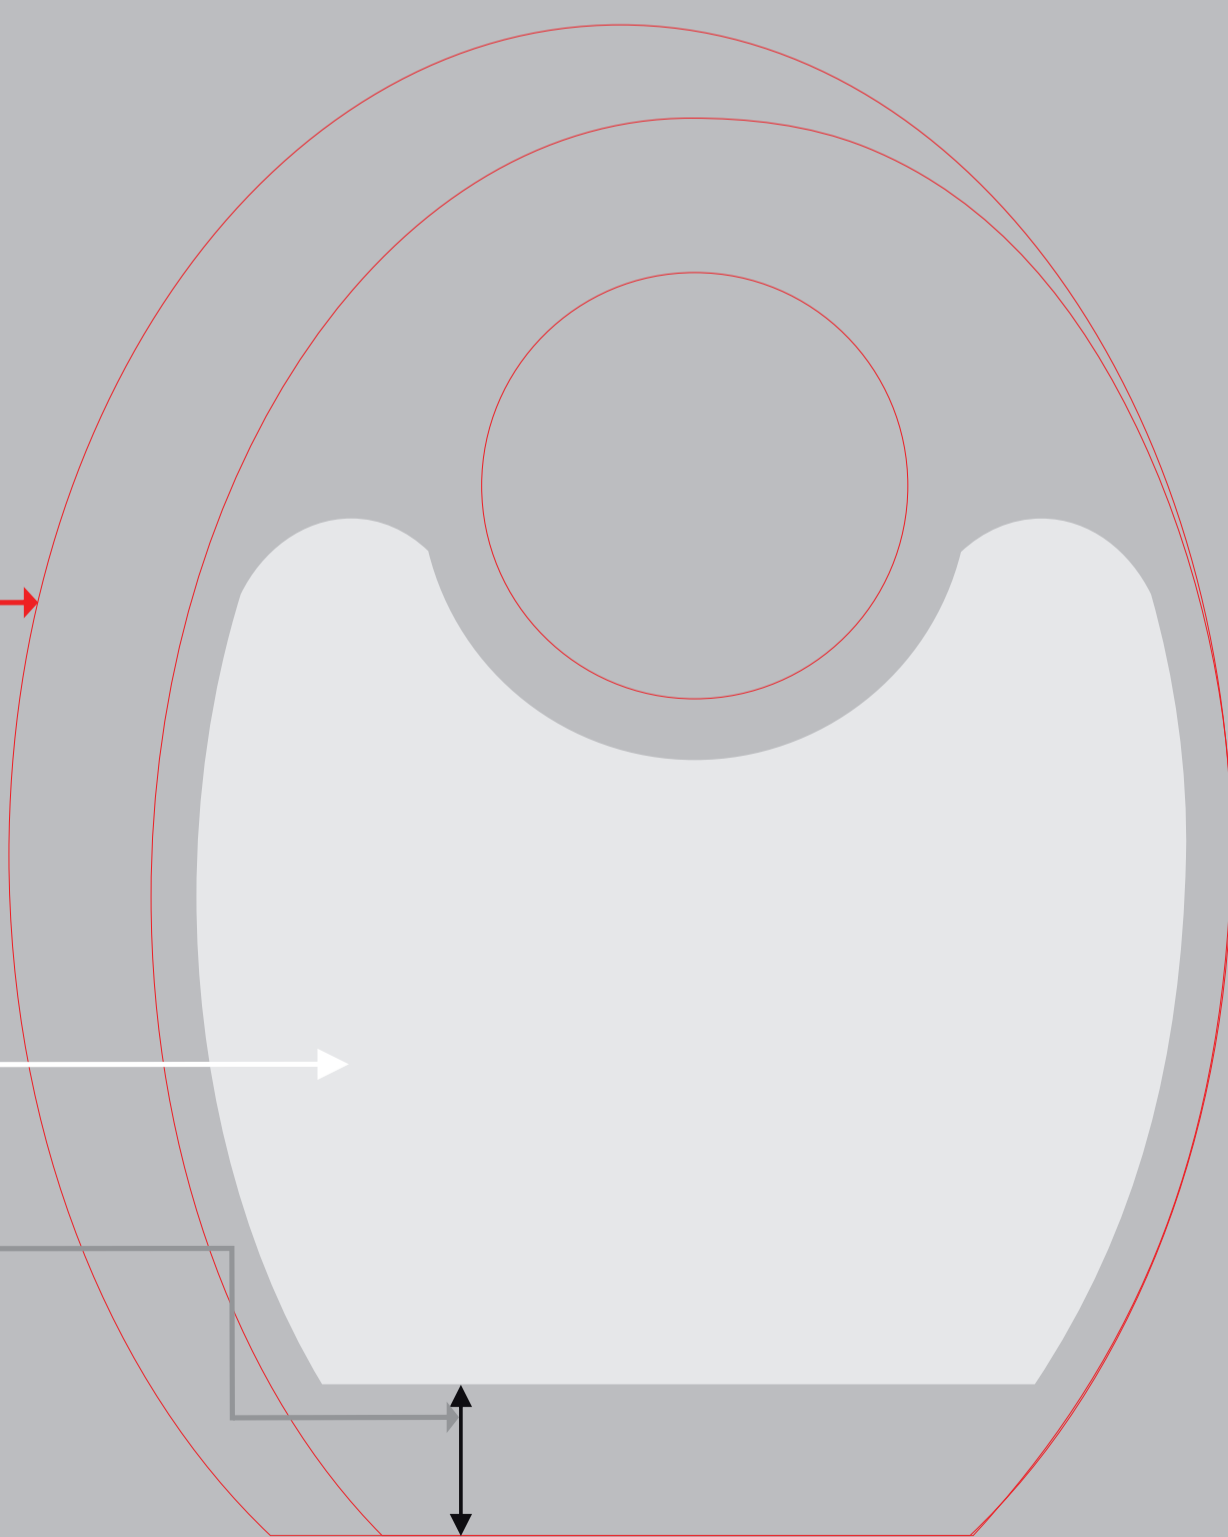

**AC008-PW**