

LUXORJET

1. White colour as a background on the whole surface of the acrylic trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)

Tips when preparing the artwork by yourself

AW002/LUX

LUXORJET

if the coloured background has to reach the edge of the acrylic, extend it beyond the outline of the glass 2 mm on each side

minimum resolution for illustrations or photos 300 dpi


external outline of the acrylic- TEMPLATE please do not change the color and thickness of the line

all fonts converted to curves

smallest font used 8 pt

minimum thickness of lines used in the design 0.2 mm

an area where essential elements should be placed, i.e. text, logo, etc.

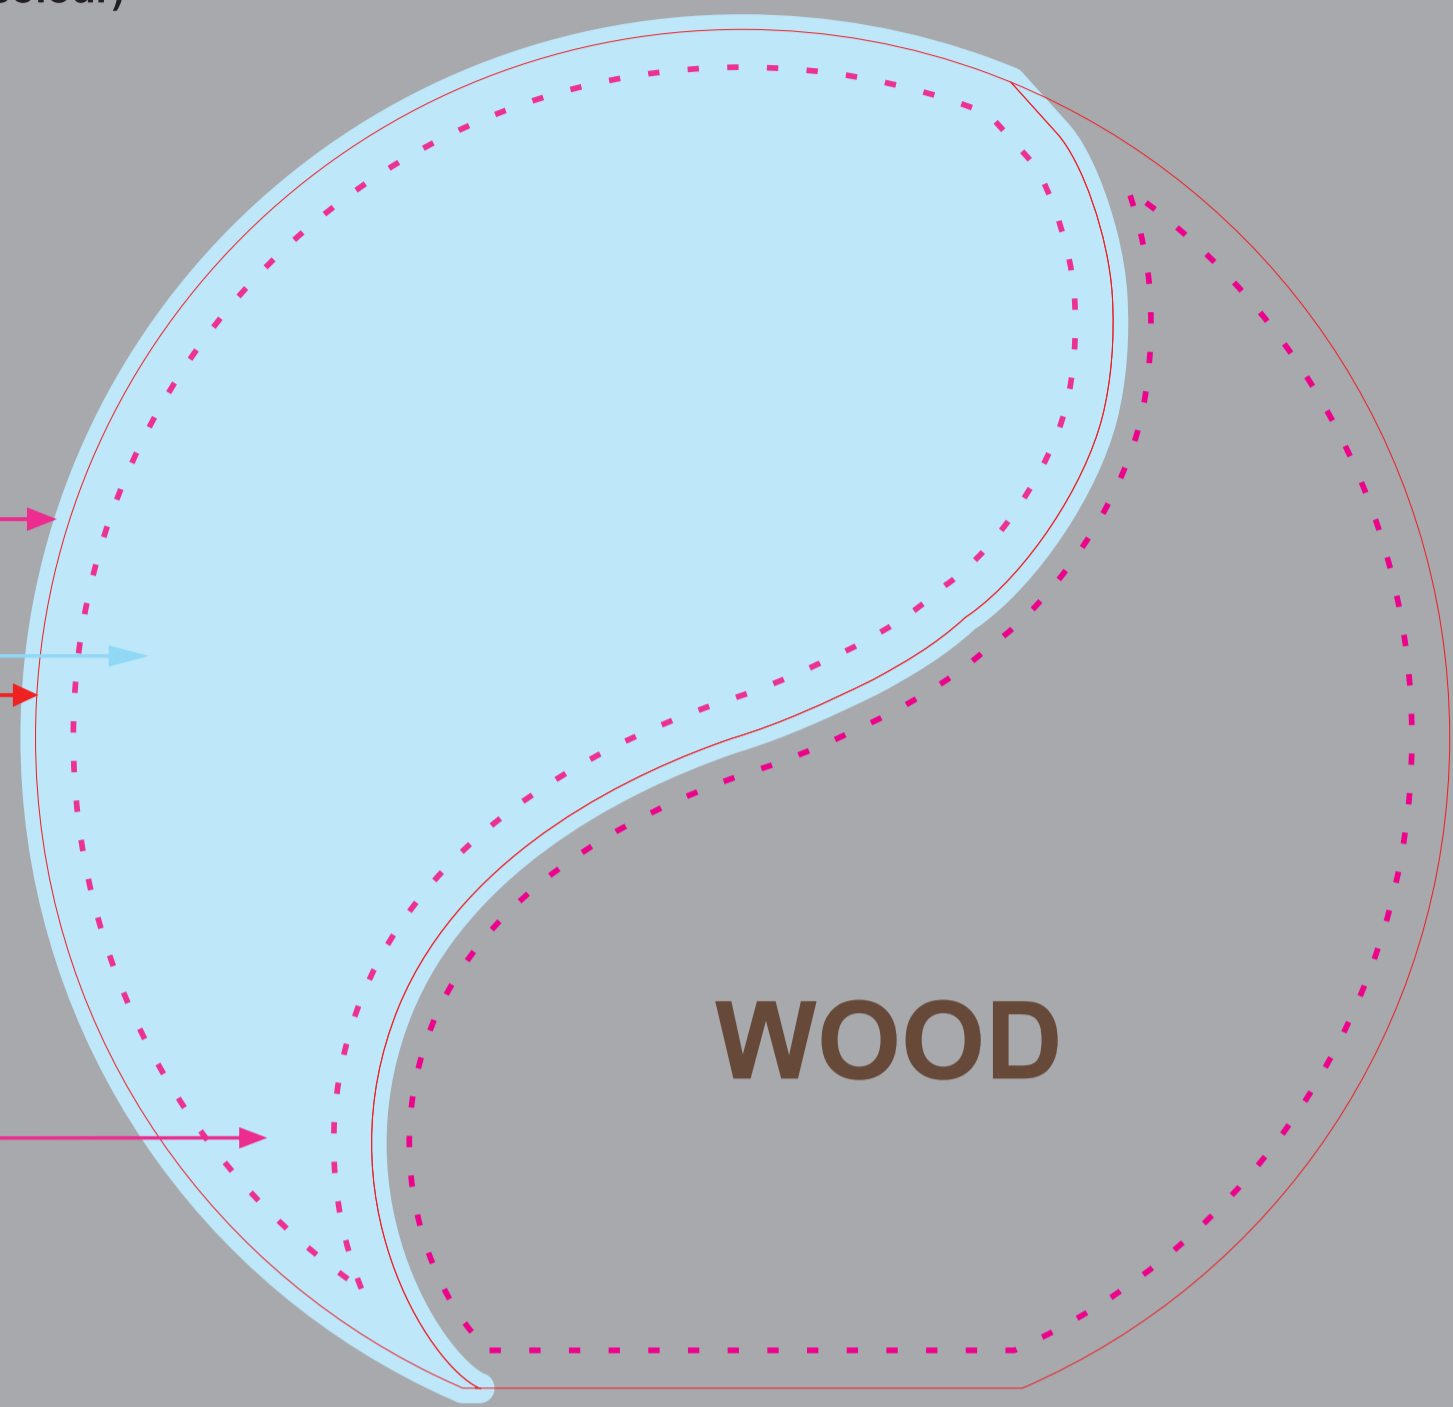

AW002

ENGRAVING

Tips when preparing the artwork by yourself

AW002/GR

external outline of the acrylic- TEMPLATE please do not change the color and thickness of the line

all fonts converted to curves

smallest font used 8 pt

minimum thickness of lines used in the design 0.2 mm

laser engraving area


we only use vector objects (inscriptions, logos, characters)

WOOD

the pattern for engraving will be prepared in 100 % black in C M Y K scale

ACRYLIC

the pattern for engraving will be prepared in grey using 70 % black in C M Y K scale

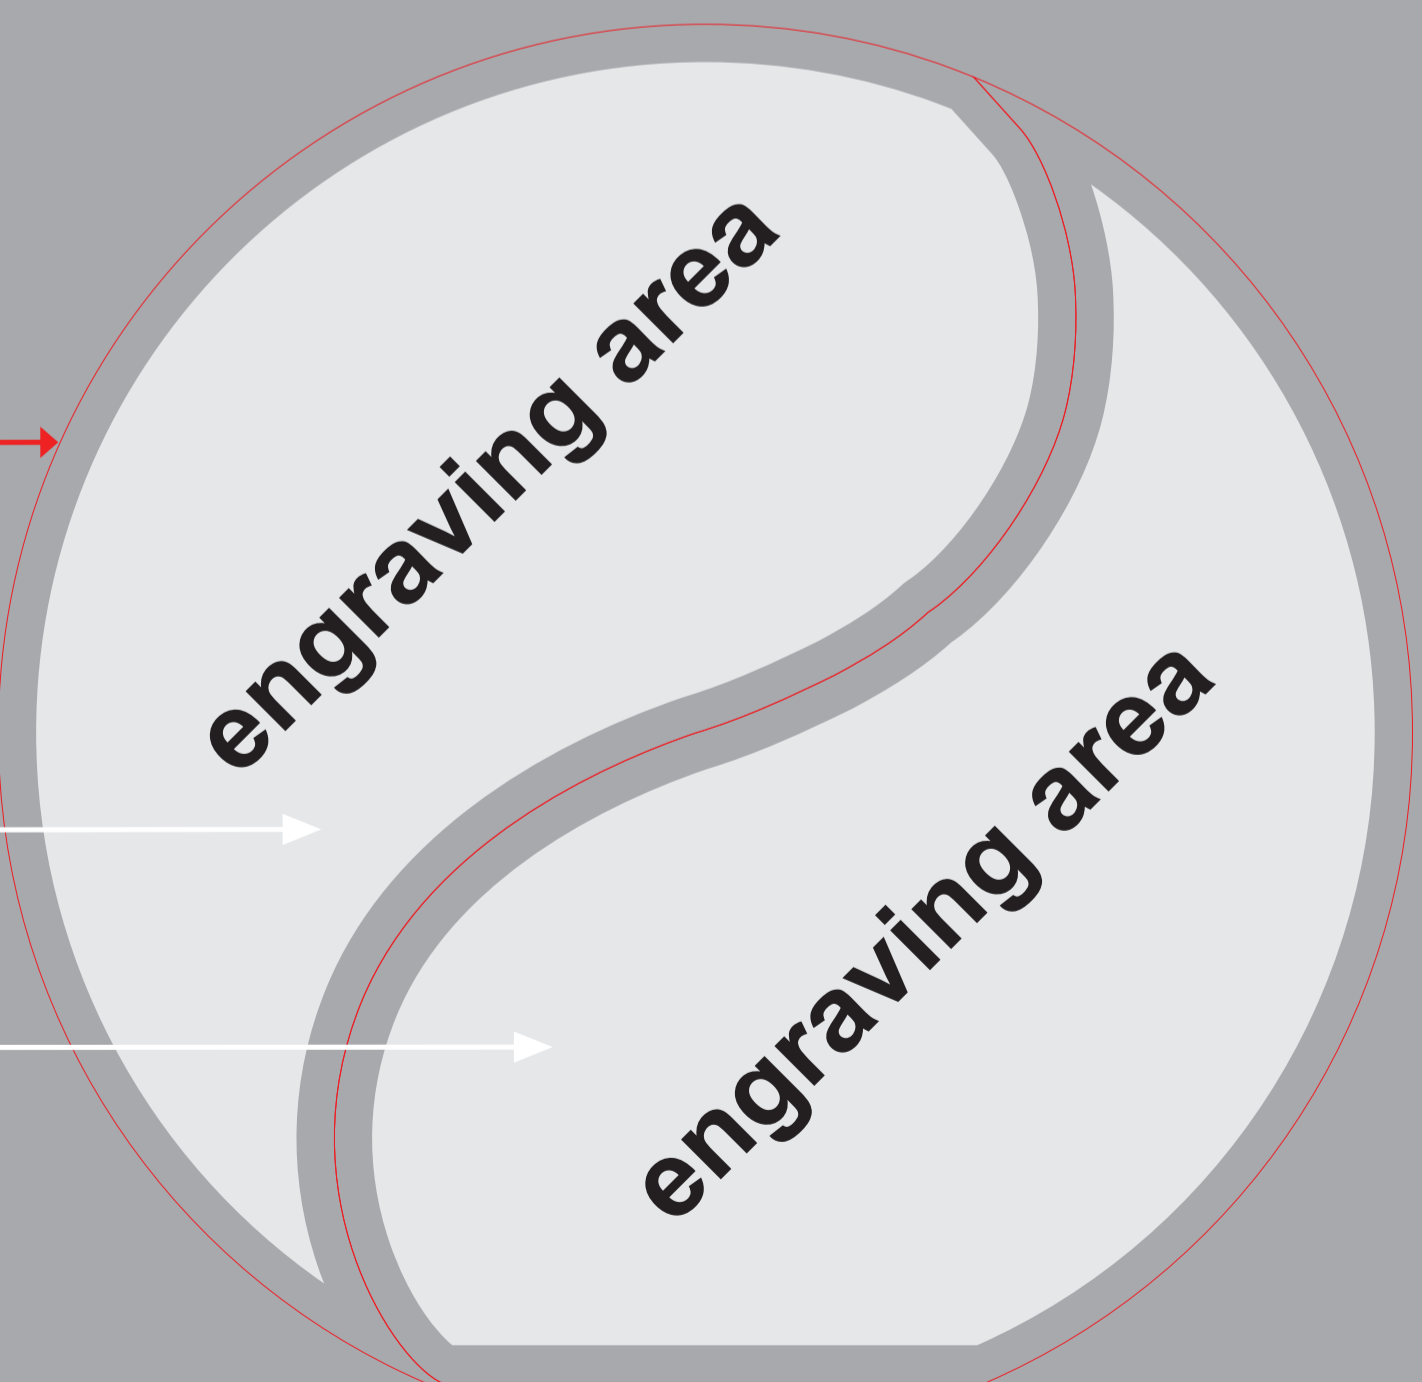

AW002