


# LUXORJET

1. White colour as a background on the whole surface of the acrylic trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)

## Tips when preparing the artwork by yourself

LUXORJET
if the coloured background has to reach the edge of the acrylic extend it beyond the outline of the glass 8 mm on each side
minimum resolution for illustrations or photos 300 dpi
external outline of the acrylic - TEMPLATE please do not change the color and thickness of the line
<b>all fonts converted to curves</b>
smallest font used 8 pt
minimum thickness of lines used in the design 0.2 mm

an area where essential elements should be placed, i.e. text, logo, etc.

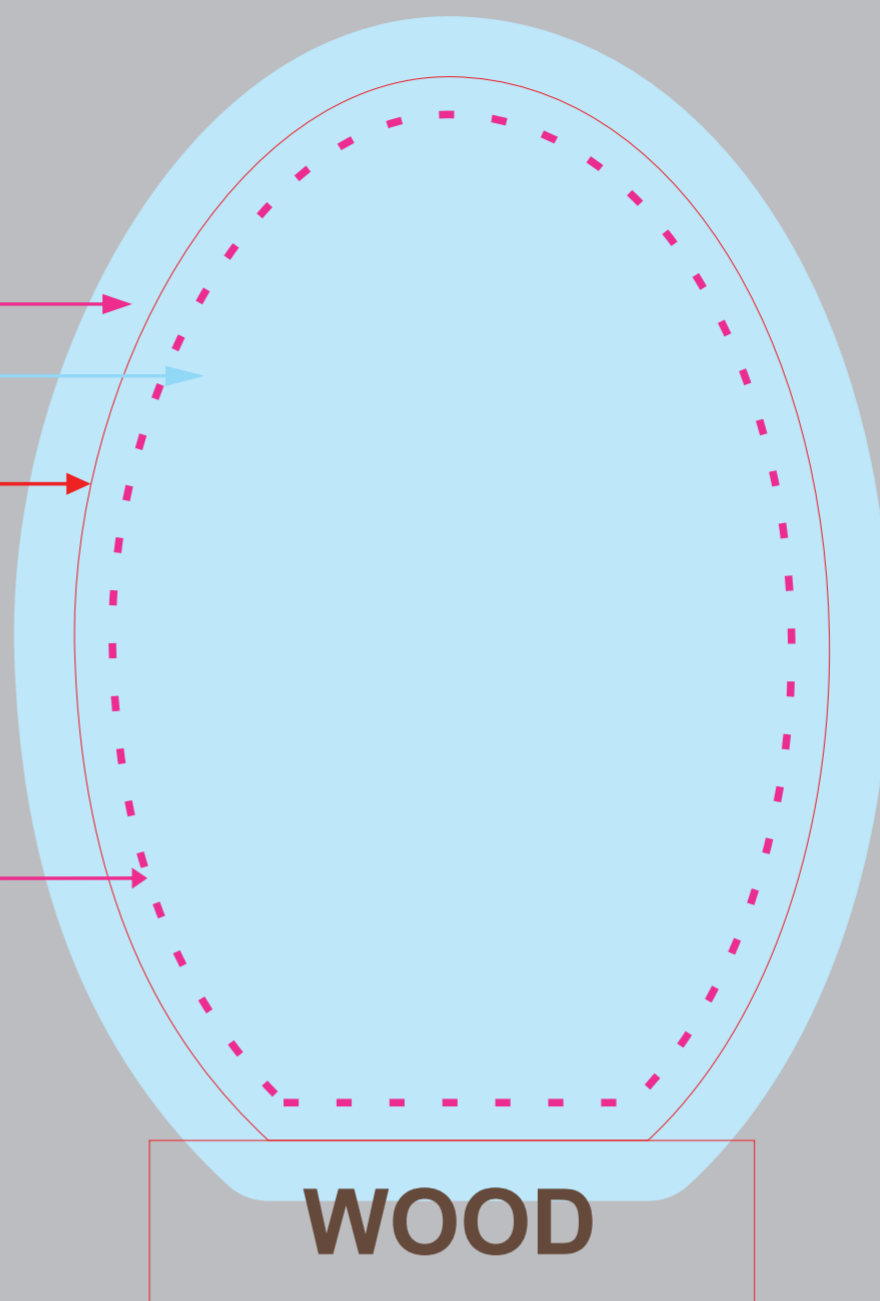


AW005-PW

# ENGRAVING

## Tips when preparing the artwork by yourself

external outline of the acrylic - TEMPLATE please do not change the color and thickness of the line
<b>all fonts converted to curves</b>
smallest font used 8 pt
minimum thickness of lines used in the design 0.2 mm
<b>laser engraving area</b>
we only use vector objects (inscriptions, logos, characters )
the pattern for engraving will be prepared in grey using 70 % black in C M Y K scale
distance of the lowest inscription from the base 20 mm

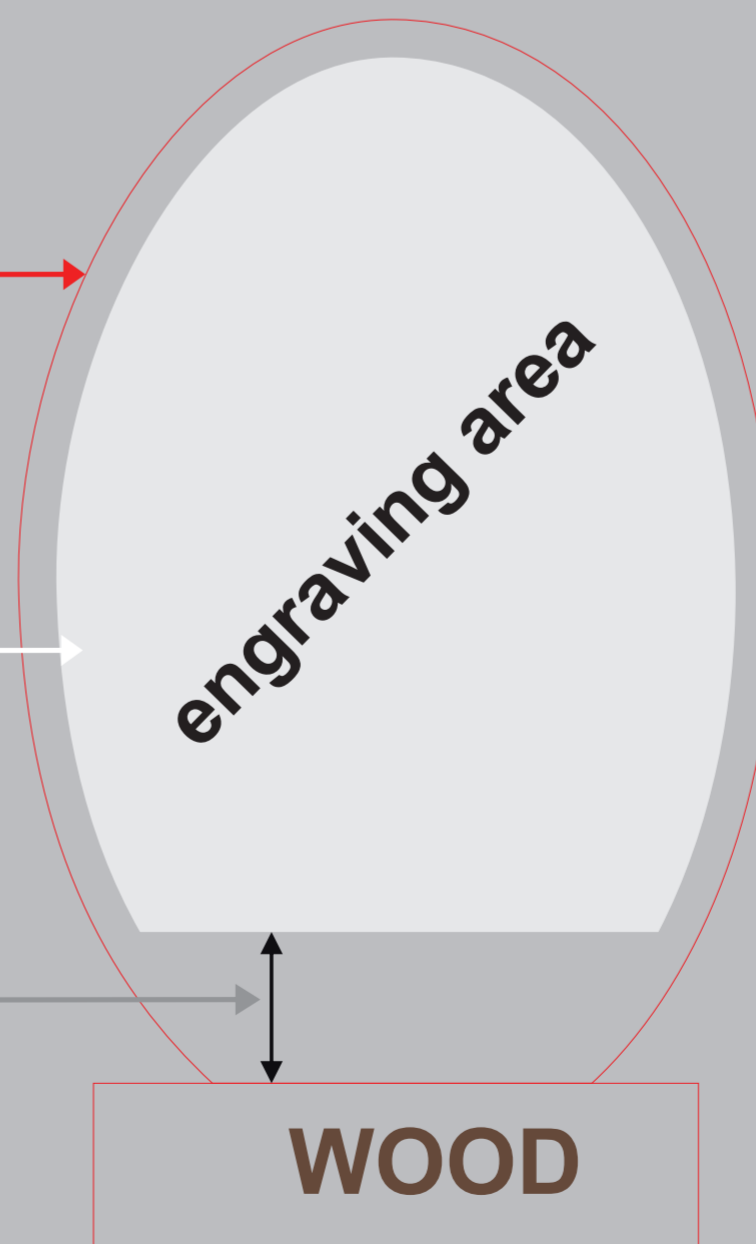

AW005-PW