

LUXORJET


1. White colour as a background on the whole surface of the glass trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)

Tips when preparing the artwork by yourself

LUXORJET

C036/LUX

- if the coloured background has to reach the edge of the glass, extend it beyond the outline of the glass 5 mm on each side
- minimum resolution for illustrations or photos 300 dpi
- external outline of the glass - TEMPLATE please do not change the color and thickness of the line
- all fonts converted to curves**
- smallest font used 8 pt
- minimum thickness of lines used in the design 0.2 mm

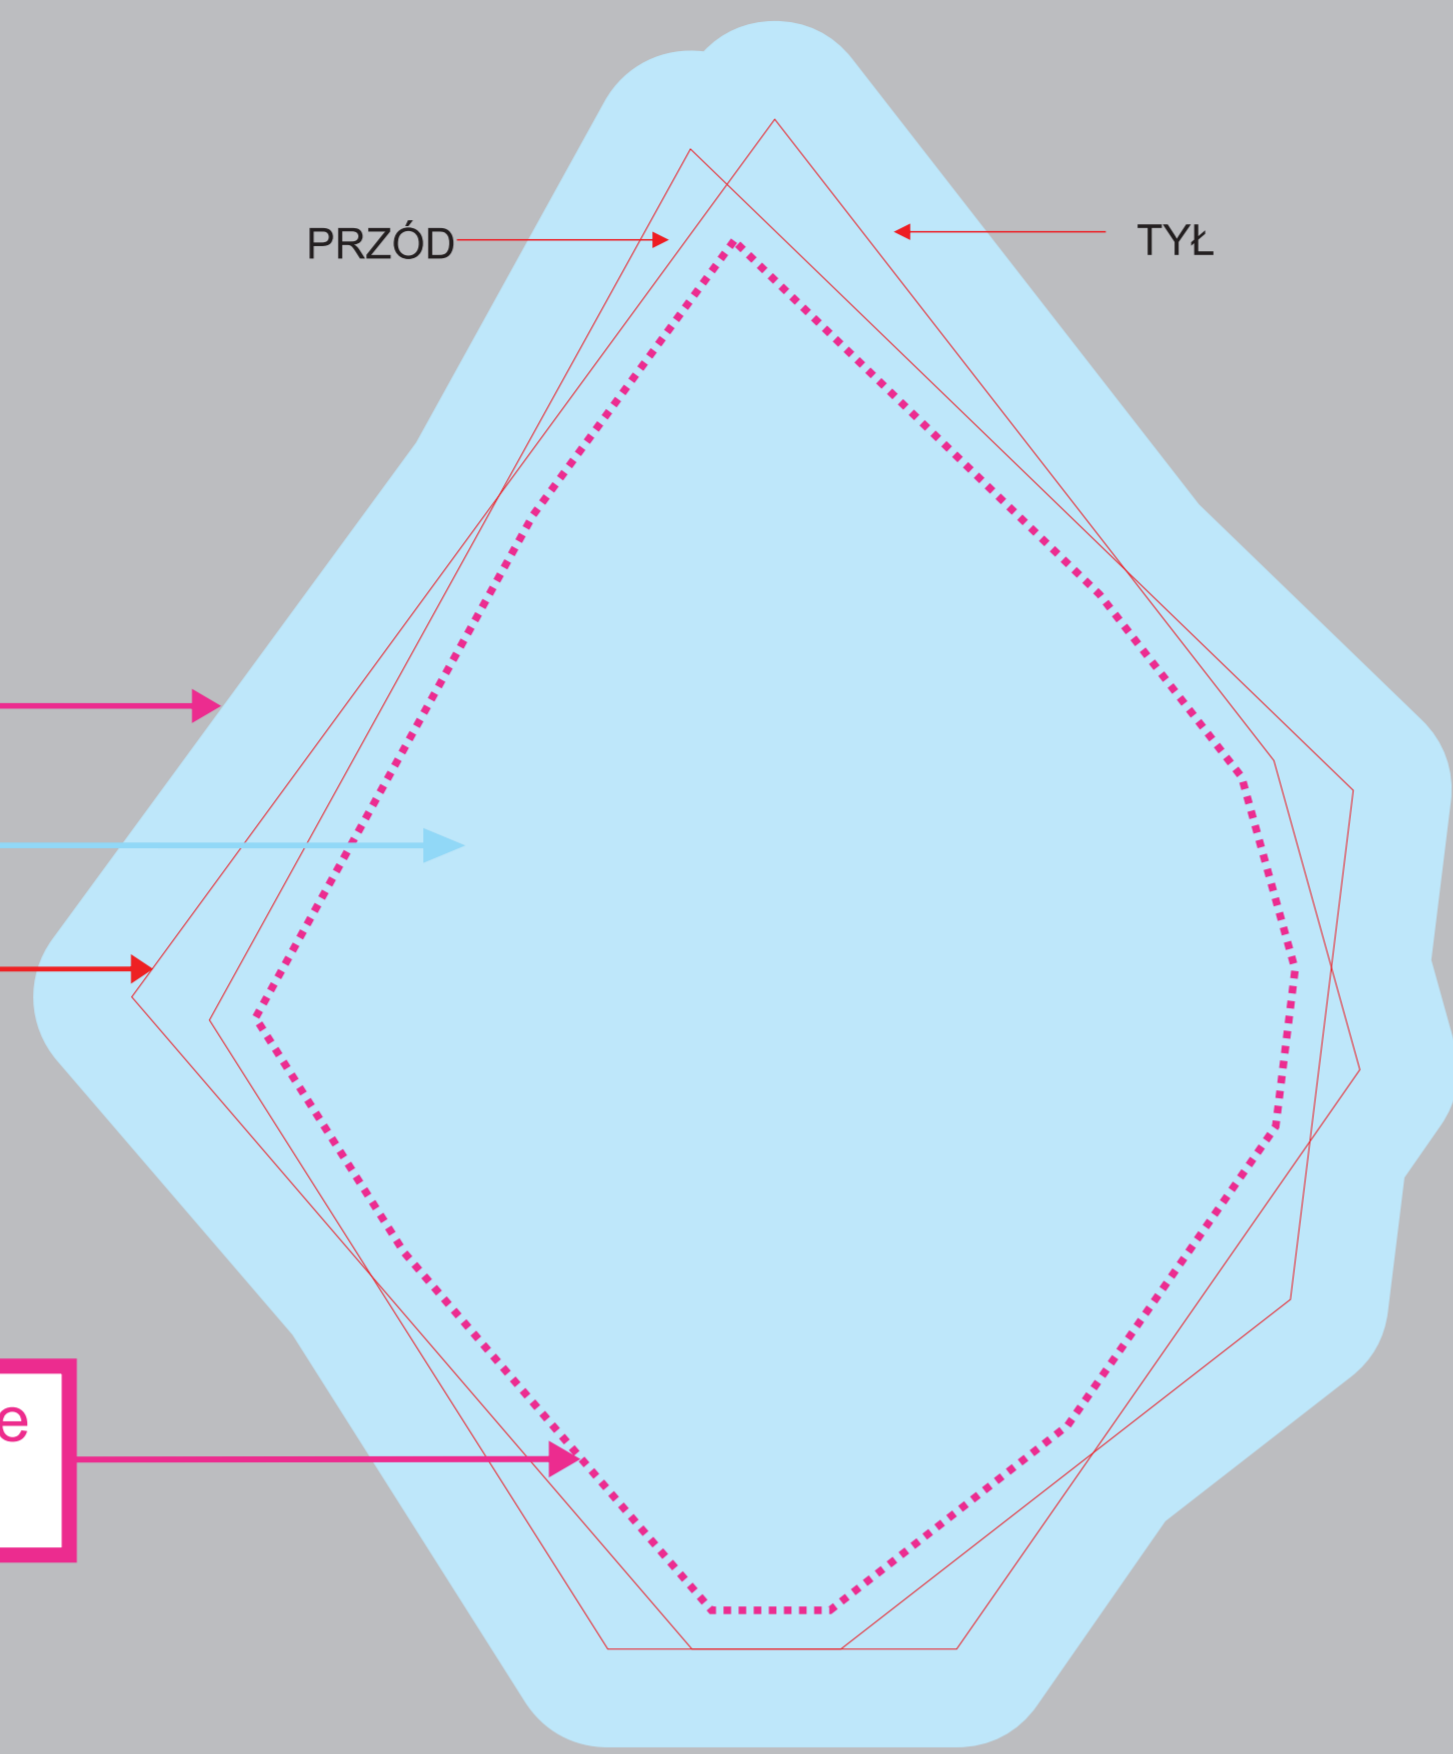

an area where essential elements should be placed, i.e. text, logo, etc.

C036

ENGRAVING

Tips when preparing the artwork by yourself


ENGRAVING

C036/GR

- external outline of the glass - TEMPLATE please do not change the color and thickness of the line
- all fonts converted to curves**
- smallest font used 8 pt
- minimum thickness of lines used in the design 0.2 mm
- laser engraving area**
- we only use vector objects (inscriptions, logos, characters)
- the pattern for engraving will be prepared in grey using 70% black in C M Y K scale
- when filling with paint, please specify colour (paint palette in separate file)
- distance of the lowest inscription from the base 20 mm

ENGRAVING

! Because of manual processing of the glass trophies, template may slightly differ from the final product.

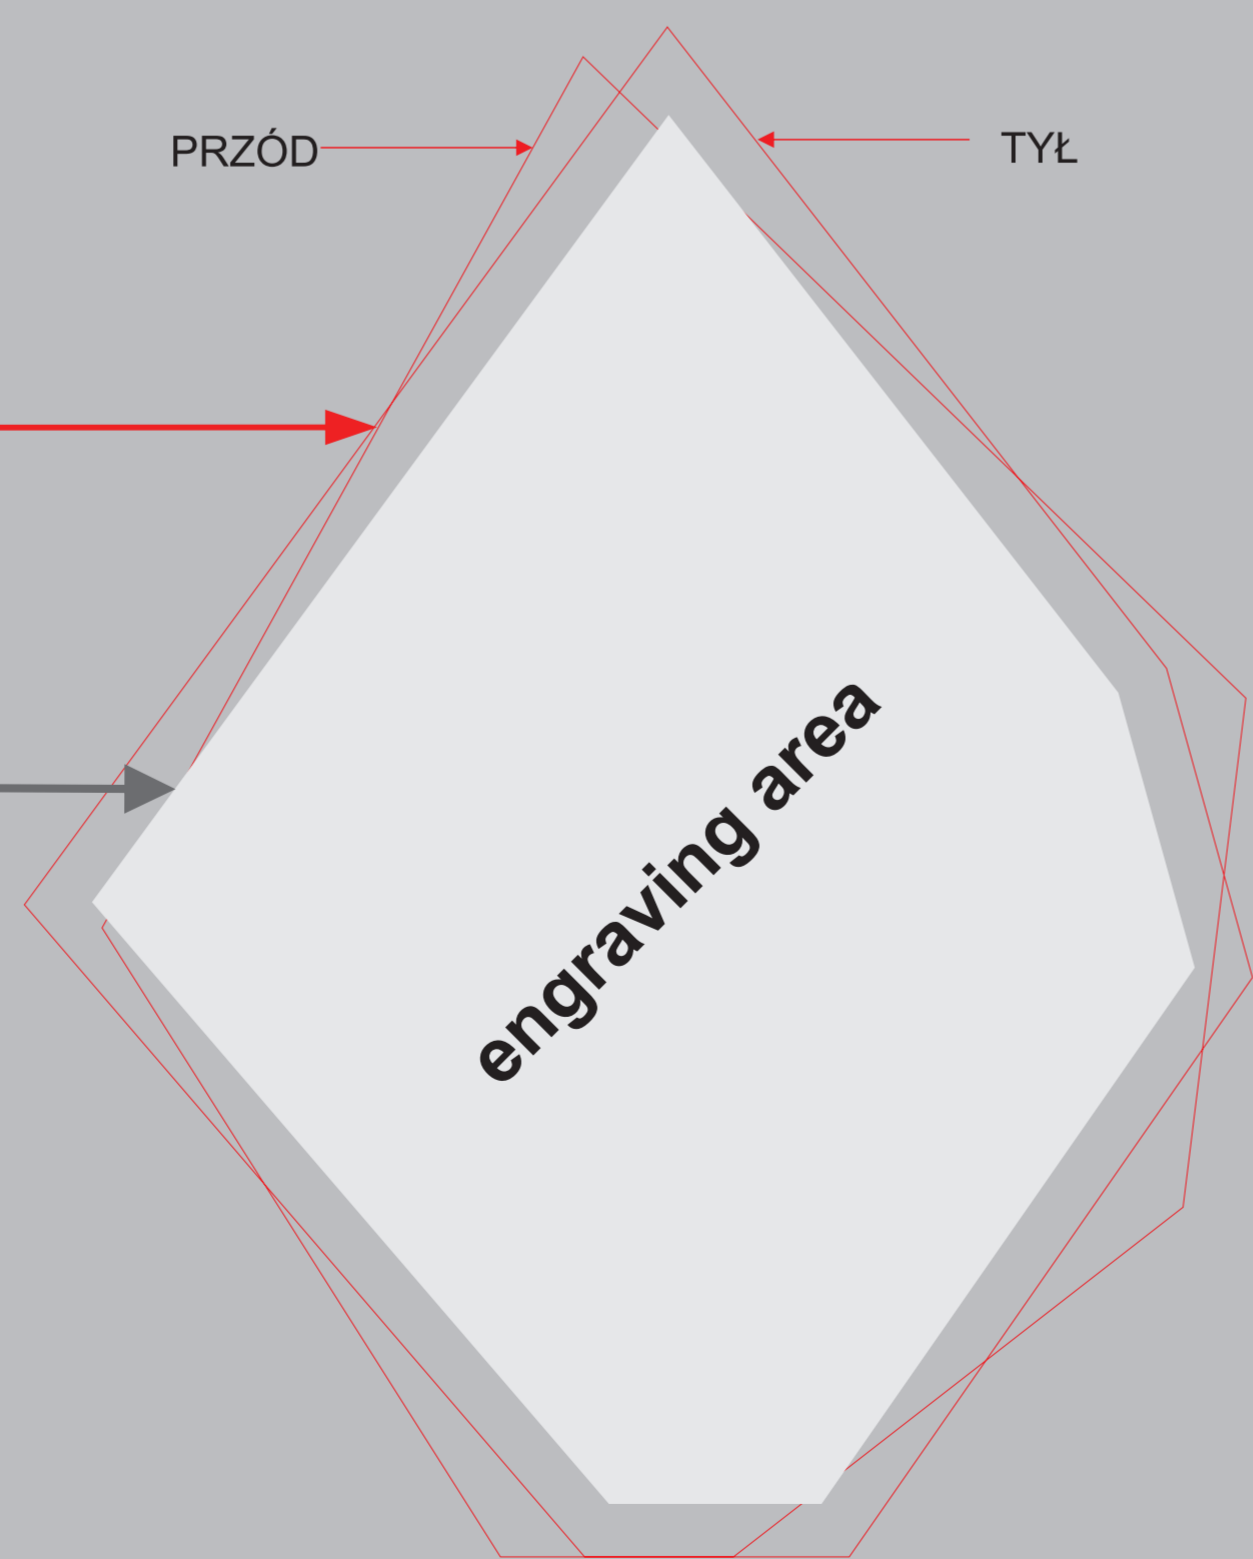

C036

ETUI

