

LUXORJET

1. White colour as a background on the whole surface of the glass trophy
2. White colour as a background under the colour pixels
3. Slightly transparent colour print (without a white colour)

Tips when preparing the artwork by yourself

LUXORJET

80013/LUX

If the coloured background has to reach the edge of the glass, extend it beyond the outline of the glass 8 mm on each side


minimum resolution for illustrations or photos 300 dpi

external outline of the glass - TEMPLATE please do not change the color and thickness of the line


all fonts converted to curves

smallest font used 8 pt

minimum thickness of lines used in the design 0.2 mm

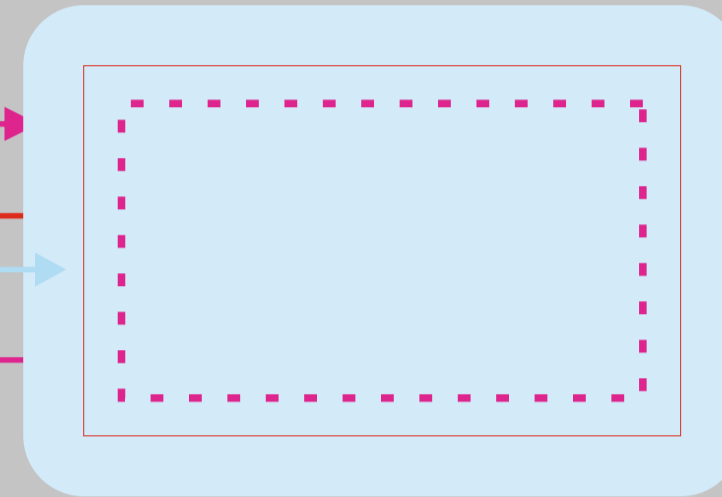

KR5080



an area where essential elements should be placed, i.e. text, logo, etc.

! Because of manual processing of the glass trophies, template may slightly differ from the final product.

ENGRAVING

Tips when preparing the artwork by yourself

ENGRAVING

80013/GR

external outline of the glass - TEMPLATE please do not change the color and thickness of the line

all fonts converted to curves

smallest font used 8 pt

minimum thickness of lines used in the design 0.2 mm

laser engraving area

we only use vector objects (inscriptions, logos, characters)


the pattern for engraving will be prepared in grey using 70 % black in C M Y K scale

when filling with paint, please specify colour (paint palette in separate file)

distance of the lowest inscription from the base 20 mm



KR5080



! Because of manual processing of the glass trophies, template may slightly differ from the final product.